
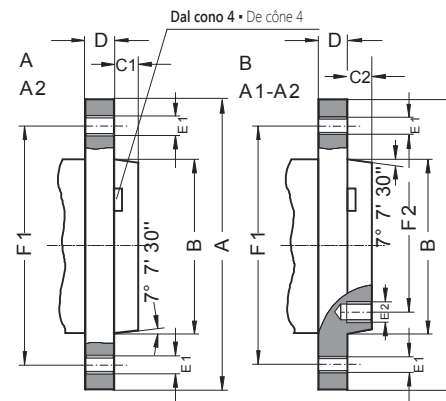




Dim. naso macchina	A	B max.	C1	C2	D	E1 (DIN)	E1 (ISO)	F1	E2 (DIN)	E2 (ISO)	F2
Taille de broche											
3	92	53,983	11	-	16	3xM10	-	70,6	-	-	-
4	108	63,521	11	-	20	11xM10	-	82,6	-	-	-
5	133	82,573	13	14,288	22	11xM10	-	104,8	8xM10	-	61,9
6	165	106,385	14	15,875	25	11xM12	-	133,4	8xM12	-	82,6
8	210	139,731	16	17,462	28	11xM16	-	171,4	8xM16	-	111,1
11	280	196,883	18	19,050	35	11xM20	11xM18	235,0	8xM20	8xM18	165,1
15	380	285,791	19	20,638	42	12xM24	12xM22	330,2	11xM24	11xM22	247,6
20	520	412,795	21	22,225	48	12xM24	-	463,6	11xM24	-	368,3
28	725	584,248	24	25,400	56	12xM30	-	647,6	11xM30	-	530,2


DIN 55026 - TIPO A, TIPO B/ TYPE A2, TYPE B
ISO 702/I - TIPO A2, TIPO A1-A2/ TYPE A2, TYPE A1-A2



- Tipo A: Fori filettati (esterni al cono) senza fori interni
- Tipo B: Fori filettati esterni e interni
- Dimensioni tra parentesi a norma ISO 702/I
- Type A: Filetages dans le contre-plateau (cercle de trous extérieur) sans cercle de trous intérieur
- Type B: Filetages dans le contre-plateau (cercle de trous extérieur) et dans le cercle de trous intérieur
- Les dimensions entre parentheses correspondent à l'ISO 702/I



Dim. naso macchina	A	B max.	C	D	E	F
Taille de broche						
3	102	53,983	11	16	3x21	75,0
4	112	63,521	11	20	3x21	85,0
5	135	82,573	13	22	4x21	104,8
6	170	106,385	14	25	4x23	133,4
8	220	139,731	16	28	4x29	171,4
11	290	196,883	18	35	6x36	235,0
15	400	285,791	19	42	6x43	330,2
20	540	412,795	21	48	6x43	463,6

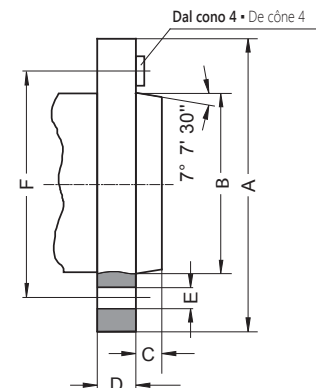


DIN 55027, ISO 702/III - TIPO C / TYPE C
CON SERRAGGIO ANELLO A BAIONNETTA
 AVEC SERRAGE ANNEAU BAÏONNETTE


Dim. naso macchina	A	B max.	C	D	E	F
Taille de broche						
3	92	53,983	11	32	3x15,1	70,6
4	117	63,521	11	34	3x16,7	82,6
5	146	82,573	13	38	6x19,8	104,8
6	181	106,385	14	45	6x23,0	133,4
8	225	139,731	16	50	6x26,2	171,4
11	298	196,883	18	60	6x31,0	235,0
15	403	285,791	19	70	6x35,7	330,2
20	546	412,795	21	82	6x42,1	463,6

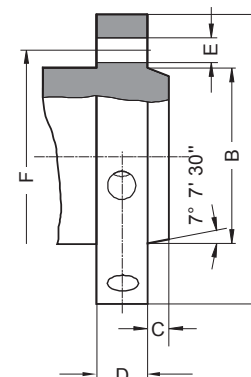
DIN 55029, ISO 702/II - TIPO D / TYPE D
CON SERRAGGIO CAMLOCK
 AVEC SERRAGE CAMLOCK


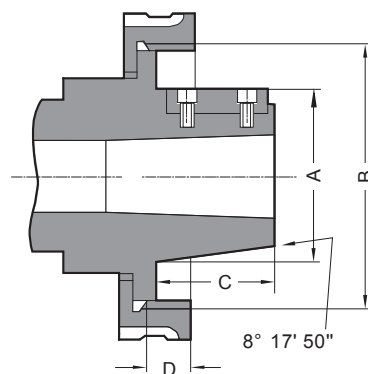

1
2
3
4
5
6

DIN 800 CON FILETTO
DIN 800 AVEC FILETAGE

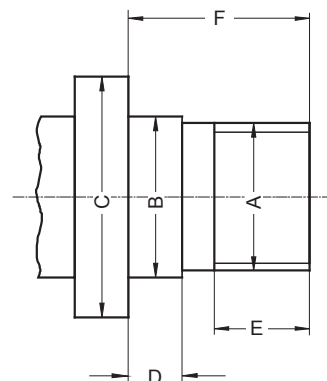

A	B g5	C min.	D	E	F
M 20	21	30	6,3	10	20
M 24	25	36	8,0	12	24
M 33	34	50	9,0	14	30
M 39	40	56	10,0	16	35
M 45	46	67	11,0	18	40
M 52	55	80	12,0	20	45
M 60	62	90	14,0	22	50
M 76x6	78	112	16,0	30	63
M 105x6	106	150	20,0	40	80

TIPO L - CONO LUNGO 7:24
TYPE L - CÔNE COURT 7:24



Dim. naso macchina Taille de broche	A +0.051	B	C	D	Trascinatore Entrainement
L00	69.850	3 3/4-6 UNS	50.800	14.288	9.525x38.10
L0	82.550	4 1/2-6 UNS	60.325	15.875	9.525x44.45
L1	104.775	6-6 UNS	73.025	19.050	15.875x60.32
L2	133.350	7 3/4-5 UNS	85.725	25.400	19.050x73.02
L3	165.100	10 3/8-4 UNS	94.425	28.575	25.400x82.55