

1

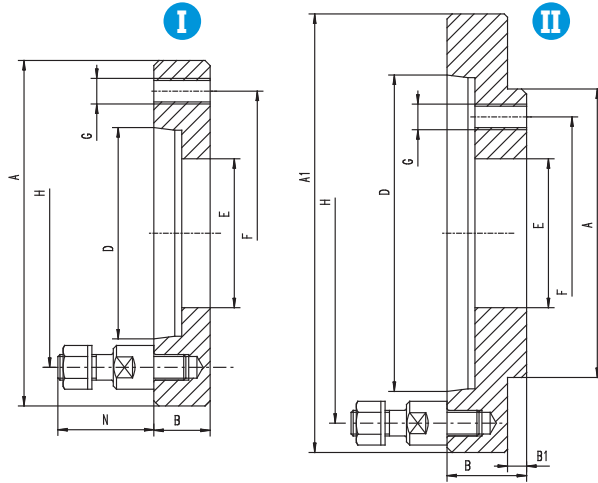
2

3

4

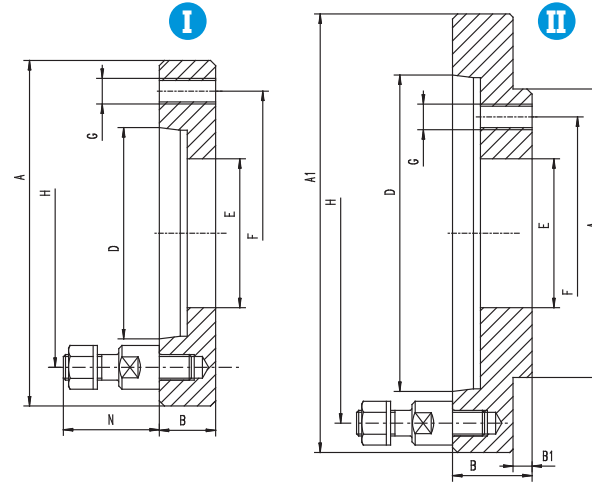
5

6

FULLY-FINISHED ADAPTER PLATES FOR
4304, 4305, 4306, 43078237-0
TYPE C

Code No.	W* [in]	Taper Size	Z*	A h6 [in]	A1 [in]	B [in]	B1 [in]	D [in]	E [in]	F [in]	G	H [in]	N [in]	No. of studs	We- ight [lbs]
7-931-084	8"	4	I	4.33	-	0.87	-	2.50	1.97	3.25	M10	3.35	1.54	3	3.09
7-931-085	8"	5	II	4.33	5.31	1.34	0.22	3.25	1.97	3.25	M10	4.13	1.69	4	6.17
7-931-086	8"	6	II	4.33	6.69	1.34	0.22	4.19	1.97	3.25	M10	5.25	1.97	4	9.70
7-931-105	10"	5	I	5.91	-	0.98	-	3.25	2.56	4.13	M12	4.13	1.69	4	6.17
7-931-106	10"	6	II	5.91	6.69	1.77	0.30	4.19	2.56	4.13	M12	5.25	1.97	4	13.67
7-931-108	10"	8	II	5.91	8.66	1.50	0.30	5.50	2.56	4.13	M12	6.75	2.36	4	18.08
7-931-125	12"	5	I	6.89	-	1.22	-	3.25	3.11	5.25	M16	4.13	1.69	4	10.14
7-931-126	12"	6	I	6.89	-	1.30	-	4.19	3.15	5.25	M16	5.25	1.97	4	10.14
7-931-128	12"	8	II	6.89	8.66	2.05	0.30	5.50	3.15	5.25	M16	6.75	2.36	4	25.79
7-931-129	12"	11	II	6.89	11.42	1.93	0.30	7.75	3.15	5.25	M16	9.25	2.95	6	35.71
7-931-166	16"	6	I	7.87	-	1.18	-	4.19	3.94	6.75	M16	5.25	1.97	4	12.35
7-931-168	16"	8	II	7.87	8.66	1.10	0.43	5.50	3.94	6.75	M16	6.75	2.36	4	11.24
7-931-169	16"	11	II	7.87	11.42	1.77	0.43	7.75	3.94	6.75	M16	9.25	2.95	6	36.16
7-931-175	16"	15	II	7.87	15.75	2.56	0.94	11.25	3.94	6.75	M16	13.00	3.54	6	81.35
7-931-206	20"	6	I	10.63	-	1.18	-	4.19	4.06	9.25	M20	5.25	1.97	4	24.91
7-931-208	20"	8	I	10.63	-	1.18	-	5.50	4.92	9.25	M20	6.75	2.36	4	22.49
7-931-209	20"	11	II	10.63	11.42	1.79	0.49	7.75	4.92	9.25	M20	9.25	2.95	6	30.86
7-931-215	20"	15	II	10.63	15.75	1.97	0.49	11.25	4.92	9.25	M20	13.00	3.54	6	63.49
7-931-258	25"	8	I	10.63	-	1.18	-	5.50	5.35	9.25	M20	6.75	2.36	4	22.71
7-931-259	25"	11	II	10.63	11.42	1.50	-	7.75	6.30	9.25	M20	9.25	2.95	6	26.46
7-931-265	25"	15	II	10.63	15.75	1.97	0.49	11.25	6.30	9.25	M20	13.00	3.54	6	69.23

W - Chuck diameter Z - adapter form

FULLY-FINISHED ADAPTER PLATES FOR
4306, 4307
32**, 35**, 36**, 37**, 38**8237-1
TYPE C

Code No.	W* [in]	Taper Size	Z*	A h6 [in]	A1 [in]	B [in]	B1 [in]	D [in]	E [in]	F [in]	G	H [in]	N [in]	No. of studs	We- ight [lbs]
7-931-328	32"	8	I	14.96	-	1.50	-	5.50	5.36	13.00	12xM24	6.75	2.36	4	66.14
7-931-329	32"	11	I	14.96	-	1.57	-	7.75	7.59	13.00	12xM24	9.25	2.95	6	55.78
7-931-335	32"	15	II	14.96	15.75	1.57	0.51	11.25	11.08	13.00	12xM24	13.00	3.54	6	44.97
7-931-338	32"	8	I	17.72	-	1.50	-	5.50	5.36	14.50	12xM24	6.75	2.36	4	95.90
7-931-339	32"	11	I	17.72	-	1.50	-	7.75	7.59	14.50	12xM24	9.25	2.95	6	84.66
7-931-345	32"	15	I	17.72	-	1.57	-	11.25	11.08	14.50	12xM24	13.00	3.54	6	71.21
7-931-409	40"; 49"	11	I	20.47	-	1.57	-	7.75	7.59	18.25	12xM24	9.25	2.95	6	120.15
7-931-415	40"; 49"	15	I	20.47	-	1.57	-	11.25	11.08	18.25	12xM24	13.00	3.54	6	106.48
7-931-420	40"; 49"	20	II	20.47	21.26	0.55	-	16.25	16.06	18.25	12xM24	18.25	3.94	6	70.99
7-931-499	49"	11	I	28.35	-	1.97	-	7.75	7.59	25.50	12xM30	9.25	2.95	6	304.24
7-931-505	49"	15	I	28.35	-	1.97	-	11.25	11.08	25.50	12xM30	13.00	3.54	6	291.01
7-931-492	49"	20	I	28.35	-	1.97	-	16.25	16.06	25.50	12xM30	18.25	3.94	6	234.79

W - Chuck diameter Z - adapter form