




Accessories 270-282


Technical Data 283-284

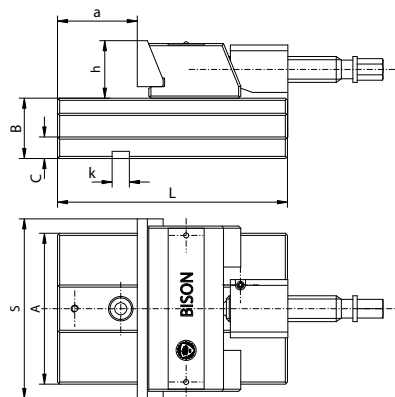

- Revised and upgraded successor model of Type 6568
- Movable element

6622

Code No.	Type	S	A	B	C	L	a	h	k	Max. clamping force	Weight
		[mm]								[daN]	[lbs]
7-223-124	6622-100	100	85	35	13	140	48	30	12	2,000	11.7
7-223-125	6622-125	125	105	42	15	160	60	40	12	3,000	19.1
7-223-126	6622-150	150	140	52	18	210	86	50	18	4,100	45.3
7-223-128	6622-200	200	165	61	20	240	78	60	18	4,500	75.5

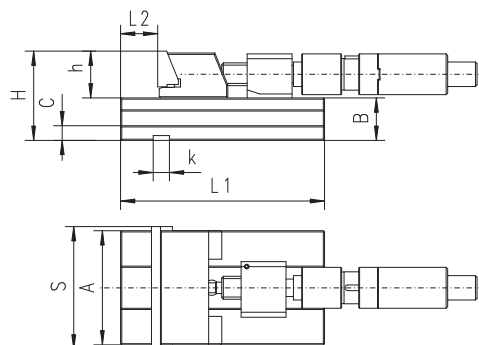

Accessories 270-282


Technical Data 283-284



- Revised and upgraded successor model of Type 6571
- Movable element with hydraulic spindle
- Similar to Type 6622

6623

Code No.	Type	S	A	B	C	H	L1	L2	h	k	Max. clamping force	Weight
		[mm]									[daN]	[lbs]
7-223-136	6623-150	150	140	52	18	102	210	86	50	18	4,100	45.3
7-223-138	6623-200	200	165	61	20	121	240	78	60	18	4,500	75.5

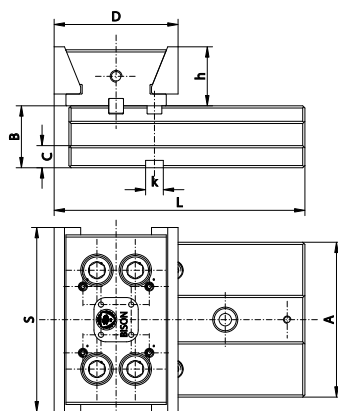

Accessories 270-282

Technical Data 283-284



- Revised and upgraded successor model of Type 6569-M
- Fixed element

6624

Code No.	Type	S	A	B	C	D	L	h	k	Max. clamping force	Weight
		[mm]								[daN]	[lbs]
7-223-144	6624-100	100	85	35	13	80	163,0	30	12	2,000	9.7
7-223-145	6624-125	125	105	42	15	84	170,0	40	12	3,000	14.7
7-223-146	6624-150	150	140	52	18	110	221,5	50	18	4,000	31.9
7-223-148	6624-200	200	165	61	20	127	253,5	60	18	4,500	58.3

1

2

3

4

5

6

6622

6623

6624