

1

2

3



4

5

6

6546

SHAFT HOLDING MACHINE VISE

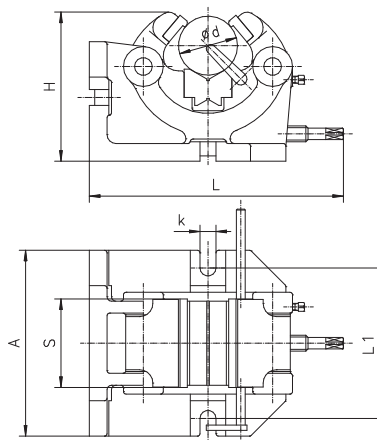

Code No.	Type	S	A	H	L	L1	d	k	Max. clamping force	Weight
		[mm]							[daN]	[lbs]
7-225-004	6546-100	100	210	170	287	170	10-63	18	1,000	46.0
7-225-005	6546-125	125	200	235	389	160	15-100	18	1,500	83.2
7-225-006	6546-160	160	242	320	456	202	50-160	18	2,000	171.6

Features:

- Able to be set up in both horizontal and vertical positions
- Hardened and ground jaw inserts and V-block
- Sturdy, cast iron design

Application:

- Ideal for most drilling and light milling operations



Standard accessories:

- Handcrank
- Slot nuts

Accessories 270-282

6910

MACHINE VISE WITH PRISMATIC GUIDANCE OF MOVABLE JAW

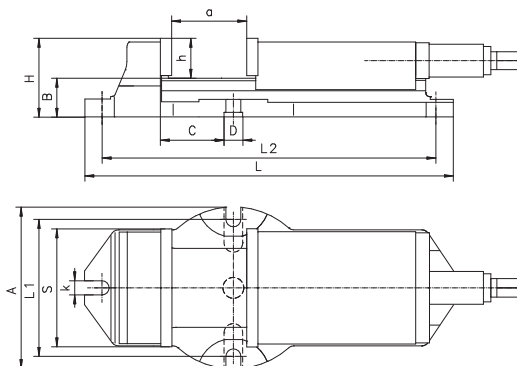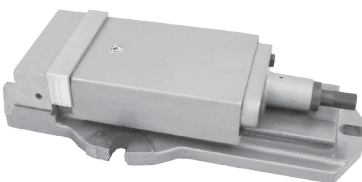

Code No.	Type	S	A	B	C	D	H	L	L1	L2	a	h	k	Max. clamping force	Weight
		[mm]												[daN]	[lbs]
7-203-004	6910-105	105	144	46	28.5	25	84	300	122	280	75	38	16	2,500	26.8
7-203-006	6910-155	155	215	52	85.5	25	105	495	183	449	165	53	20	3,800	80.1
7-203-008	6910-210	210	268	67	103.5	25	126	593	236	549	205	59	20	5,300	150.0

Features:

- Smooth jaw inserts are hardened and ground, ensuring longer life with maintained accuracy and repeatability
- Fully covered lead screw in a bronze nut protects against dirt and chips
- Body and movable jaw are high quality castings

Application:

- Designed for use with milling machines, drill presses, etc

Standard accessories:

- Adjustable end-stop
- Handcrank
- Slot nuts

Matching swivel base



Type 6583 Page 270

Accessories 270-282