



**Features:**

- Sturdy cast iron design
- Ground contact edge
- Locating pin of high quality steel, hardened and ground
- Fixing screws

**SWIVEL BASE FOR MACHINE VISES**

**6585**

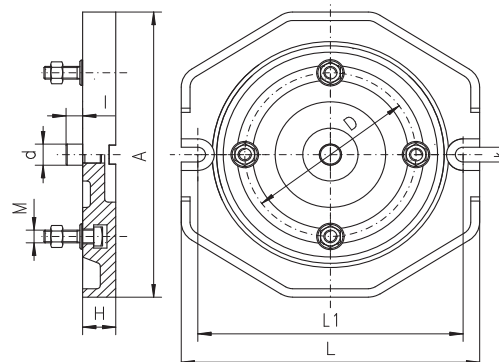



| Code No.  | Size | A    | D   | H  | L   | L1  | M   | d  | l  | k  | Weight | For Type 6516 |
|-----------|------|------|-----|----|-----|-----|-----|----|----|----|--------|---------------|
|           |      | [mm] |     |    |     |     |     |    |    |    |        |               |
| 7-251-905 | 2    | 270  | 155 | 30 | 270 | 240 | M12 | 20 | 20 | 14 | 17.8   | 125           |
| 7-251-906 | 3    | 325  | 200 | 34 | 325 | 295 | M12 | 30 | 20 | 18 | 35.2   | 160           |
| 7-251-908 | 4    | 380  | 250 | 45 | 380 | 346 | M16 | 30 | 20 | 18 | 61.4   | 200           |

**Features:**

- Sturdy iron design
- Graduation

**SWIVEL BASE FOR PRECISION VISES**

**6586**

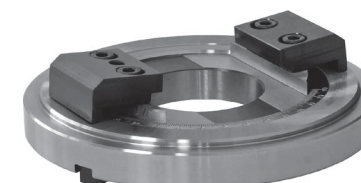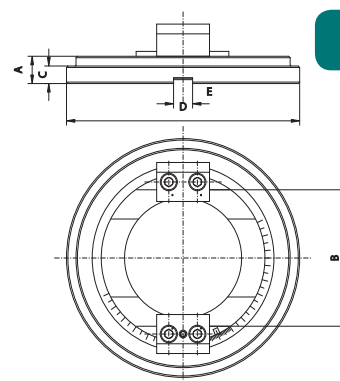

| Code No.  | Size | A    | B   | D   | C  | E  | Weight | For Type 6577, 6578, 6620, 6621 |
|-----------|------|------|-----|-----|----|----|--------|---------------------------------|
|           |      | [mm] |     |     |    |    |        |                                 |
| 7-223-540 | 1    | 23   | 85  | 190 | 13 | 12 | 8.8    | 100/320                         |
| 7-223-550 | 2    | 23   | 105 | 210 | 15 | 12 | 13.2   | 125/335                         |
| 7-223-560 | 3    | 28   | 140 | 245 | 18 | 20 | 19.8   | 150/425<br>150/475<br>150/520   |
| 7-223-580 | 4    | 30   | 165 | 280 | 20 | 20 | 24.2   | 200/535<br>200/585<br>200/635   |