




8293


- Designed for use with rotary tables with 4 and 6 T-slots

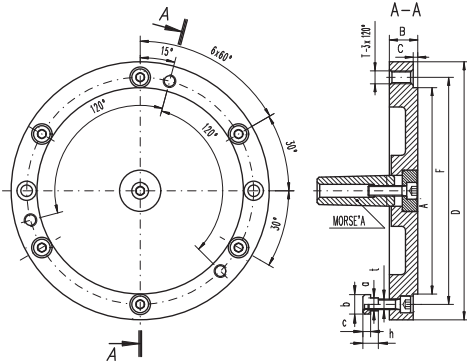


Code No.	F	A	B	C	MT	T	a	b	c	h	t	For rotary table	Chuck Size (D)
													3274, 3574, 3275, 3575
													[mm]
7-872-306	140	125	20	3.5	3	M10	10	15	6	12	4xM8	5859-160	160
7-872-308	176	160	22	3.5	3	M10	10	15	6	12	4xM8	5859-200	200
7-872-310	224	200	25	4.5	3	M12	12	18	7	14	4xM10	5859-250	250
7-872-312	286	260	30	4.5	3	M16	12	18	7	14	4xM10	5859-320	315
7-872-316	362	330	32	4.5	4	M16	14	22	8	16	6xM12	5859-400	400
7-872-320	458	420	35	4.5	5	M16	18	28	10	20	6xM16	5859-500	500

USE OF ADAPTER TYPE 8293



Self-centering lathe chucks
3274, 3275, 3574, 3575



Adapter 8293



Rotary table 5859

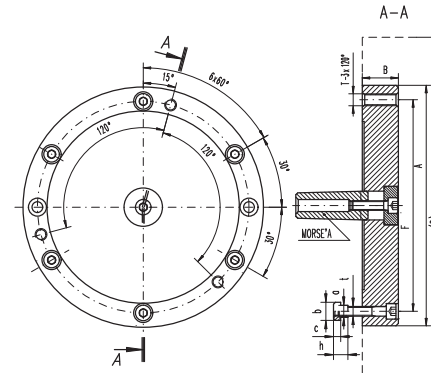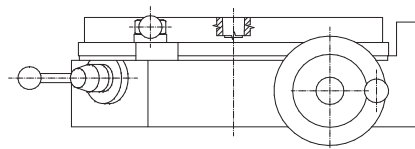

8298


- Designed for use with rotary tables with 4 and 6 T-slots



Code No.	F	A	B	B ₁	MT	T	a	b	c	h	t	For rotary table	Chuck Size (D)
													3564, 3864, 3565, 3865
													[mm]
7-872-606	140.0	86.00	33.5	16	3	M10	10	15	6	12	M8	5859-160	160
7-872-608	176.0	110.00	36.5	17	3	M10	10	15	6	12	M8	5859-200	200
7-872-610	224.0	145.00	39.5	19	3	M12	12	18	7	14	M10	5859-250	250
7-872-612	286.0	180.00	44.5	19	3	M16	12	18	7	14	M10	5859-320	315
7-872-616	171.4	298.45	30.0	-	4	M16	14	22	8	16	M12	5859-400	400
7-872-620	235.0	407.00	35.0	-	5	M20	18	28	10	20	M16	5859-500	500

9440

- Made of high quality cast iron
- Face plates 9440 can be used with indexing fixtures 5901, 5902, 5911, 5912

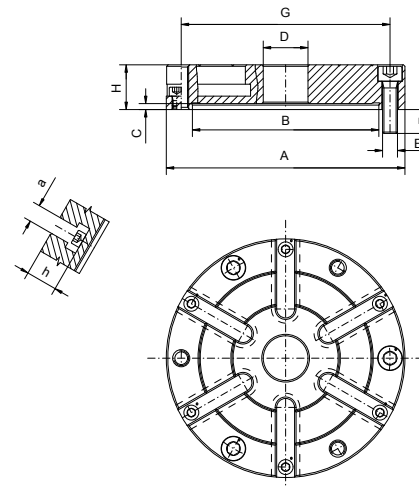

Code No.	A	B	C	D	E	F	G	H	a	h	For indexing fixtures	Weight
												[lbs]
											[mm]	
7-610-506	160	125	4	30	M10x35	16.0	140	30	12	21	125	7.5
7-610-508	200	160	5	40	M10x40	16.0	176	35	14	24	160	11.9
7-610-510	250	200	5	50	M12x60	23.0	224	50	18	31	200	27.4
7-610-512	315	260	5	50	M16x60	27.5	286	50	18	31	250	38.8