


## 1225



- Tappo di protezione (acciaio)
- Bouchon d'obturation (acier)

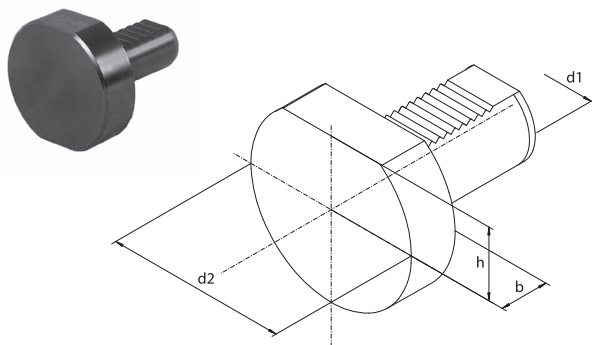


| Codice Articolo<br>Code Article | Tipo<br>Type | DIN 69880 | d1 | d2 | b  | h    |
|---------------------------------|--------------|-----------|----|----|----|------|
| 341225000100                    | 1225-16      | Z2-16     | 16 | 40 | 13 | 18,0 |
| 341225001400                    | 1225-20      | Z2-20     | 20 | 50 | 16 | 23,0 |
| 341225010300                    | 1225-25      | Z2-25     | 25 | 58 | 16 | 25,0 |
| 341225020500                    | 1225-30      | Z2-30     | 30 | 68 | 16 | 28,0 |
| 341225030700                    | 1225-40      | Z2-40     | 40 | 83 | 20 | 32,5 |
| 341225040900                    | 1225-50      | Z2-50     | 50 | 98 | 20 | 35,0 |

## 1227



- Anello di bloccaggio
- Per uso con bussola di riduzione tipo 1228
- Bagues de blocage
- Pour utilisation avec douilles de réduction type 1228

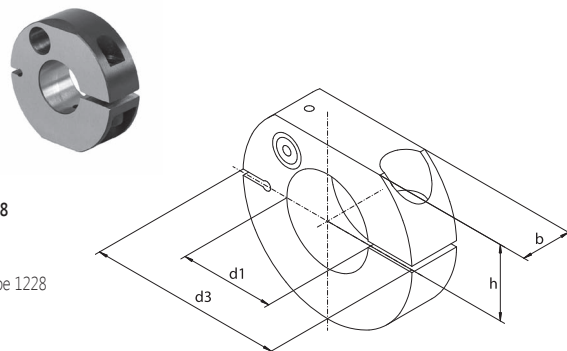


| Codice Articolo<br>Code Article | Tipo<br>Type | DIN 69880 | d1 | d3 | b  | h    |
|---------------------------------|--------------|-----------|----|----|----|------|
| 341227010000                    | 1227-20      | Z1-20     | 20 | 50 | 16 | 23,0 |
| 341227020100                    | 1227-25      | Z1-25     | 25 | 58 | 16 | 25,0 |
| 341227030300                    | 1227-30      | Z1-30     | 30 | 68 | 22 | 28,0 |
| 341227040500                    | 1227-40      | Z1-40     | 40 | 83 | 22 | 32,5 |
| 341227050700                    | 1227-50      | Z1-50     | 50 | 98 | 30 | 35,0 |

## 1228



- Bussola di riduzione a cono Morse
- Douille de réduction avec cône Morse

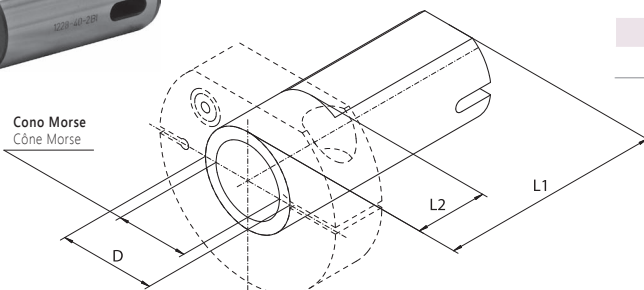

| Codice Articolo<br>Code Article | Tipo<br>Type | D  | Cono Morse<br>Cône Morse | L1  | L2 |
|---------------------------------|--------------|----|--------------------------|-----|----|
| 341228030100                    | 1228-40-2BI  | 40 | 2                        | 95  | 30 |
| 341228031400                    | 1228-40-3BI  | 40 | 3                        | 95  | 30 |
| 341228032700                    | 1228-40-4BI  | 40 | 4                        | 118 | 55 |